

►► Single Chlorine Room Door TT5

Completely made from stainless steel

**In accordance with UVV and DVGW standards.
Applicable for access to rooms where chlorine gas
is stored or used.**

Chlorine room door, single door, ready for installation, double skinned, completely made from 1.4571/1.4404 stainless steel (AISI 304), with double rubber seal. The door and frame closing flush, the door opening to the outside (in escape direction).

Door, skin: 1 mm, 55 mm thick, with injected CFCs-free polyurethane hard foam insulation, longitudinally ground surface finish, door inside lacquered in RAL 9006 (stainless steel look), with rubber seal. Fastened to the frame with stable maintenance-free hinge plates. Two aeration slits, W x H = 100 x 20 mm (one in top door section, one in bottom door section), with insect screen.

Mortise dead lock provided for profile double cylinder (which is not included in the supply contract), with anti-panic function. Stainless steel door handle set, button outside, handle inside.

Z-frame, three-sided, fabricated from special section, with inserted rubber seal, with step flashing (see drawing), including fixing material.

Frame and door shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.

Ordering options:

Frame:

- Z-frame
- Stock frame

Mounting:

- Embedded
- Bolted
 - with dowelling clips
 - through the frame not to affect the finished wall

Door opening options:



- Hinges on left
- Hinges on right

Sill closure:

- With step flashing

Special accessories available on request:

- Surface finish (lacquer, copper covering, wooden panelling)
- Upper door closer
- One-part or two-part door arrestor
- Stock frame insulation

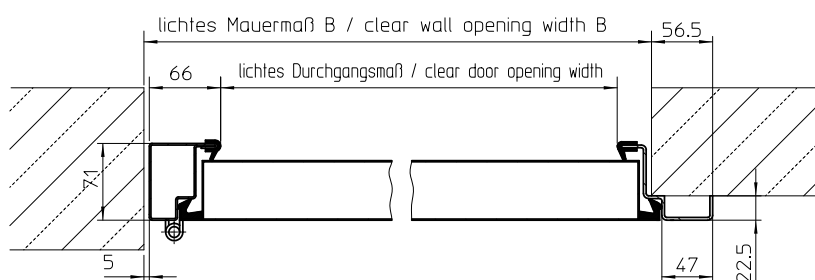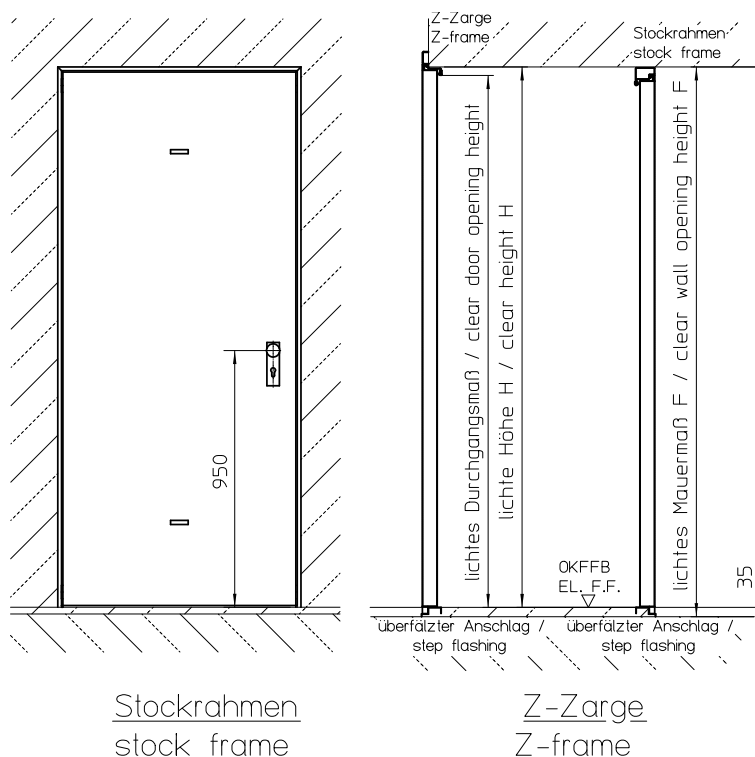

We manufacture to your specifications. Clear wall opening (F) = distance between bottom edge of lintel and top edge of unfinished floor
Clear height (H) = distance between bottom edge of lintel and top edge of finished floor

Installation place	clear width (B)	clear wall opening (F)	clear height (H)

HUBER SE

Industriepark Erasbach A1 · D-92334 Berching
Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810
info@huber.de · Internet: www.huber.de

Subject to technical modification
Drawing No. 190.166, 10.2014

Single Chlorine Room Door TT5